


PIN	SYMBOL	PIN	SYMBOL
1	K	21	B0
2	A	22	B1
3	GND	23	B2
4	VCC	24	B3
5	R0	25	B4
6	R1	26	B5
7	R2	27	B6
8	R3	28	B7
9	R4	29	GND
10	R5	30	DOTCLK
11	R6	31	DISPLAY
12	R7	32	HSYNC
13	G0	33	VSYNC
14	G1	34	ENABLE
15	G2	35	NC
16	G3	36	GND
17	G4	37	GRB (NC)
18	G5	38	SCL
19	G6	39	SDA
20	G7	40	CS

Backlight circuit diagram:

$V_f = 18V(\text{typ.}) 20V(\text{max.})$

$I_f = 80mA$

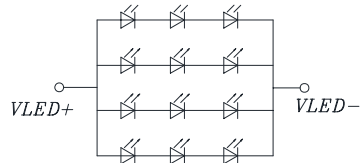

1	Operating Voltage:	VCC=3.3V (typ.)
2	Resolution:	800RGB*480
3	Color:	16M
4	Interface:	RGB
5	Display type:	Transmissive, IPS Normally black
6	Viewing Direction:	ALL VIEW
7	Operating Temp:	-20°C~70°C
8	Storage Temp:	-30°C~80°C
9	Driver IC:	HX8264-D06 HX8664-B
10	Unspecified tolerance:	±0.2
11	LCM Luminance:	750cd/m ² (min.) 950cd/m ² (typ.)